





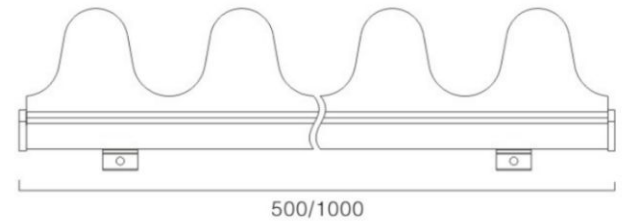


Acrylic panel light cover building, instead of general glass. Not only saving cost, but also avoiding sunshine prevent by glass. In day, people can't aware there is a cover out of building

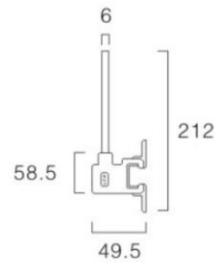




Light along acrylic pattern, by changes of colors makes a magic environment.

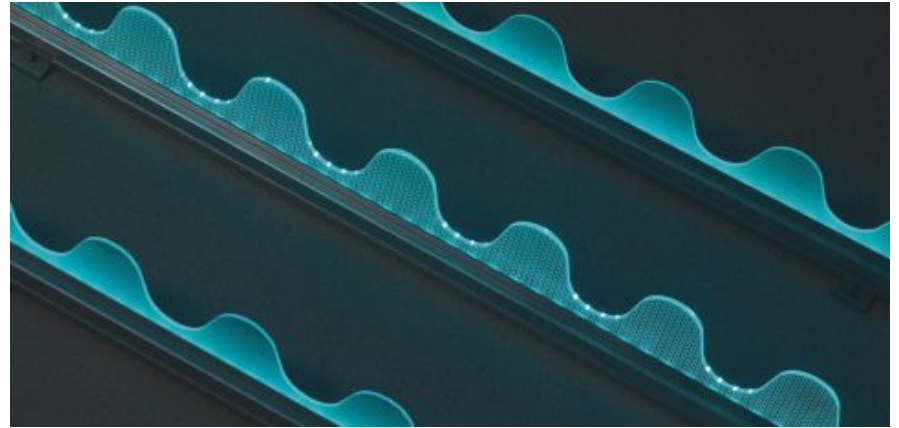

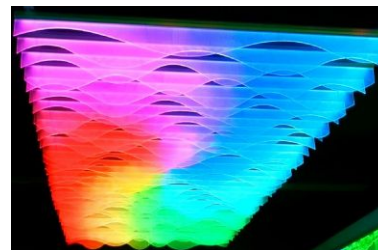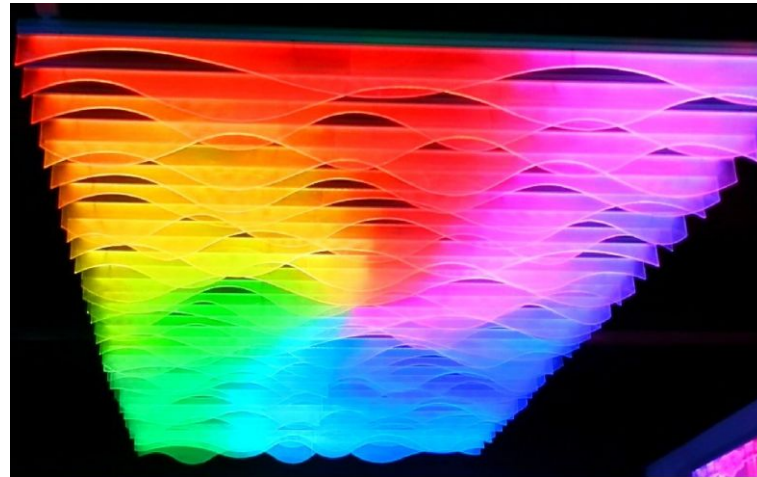






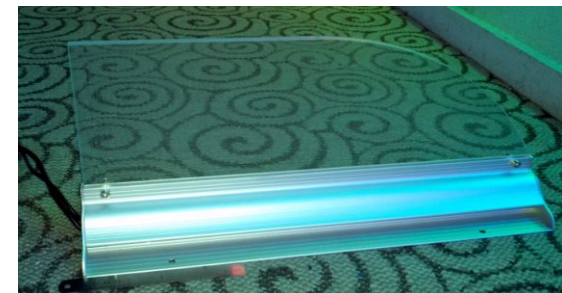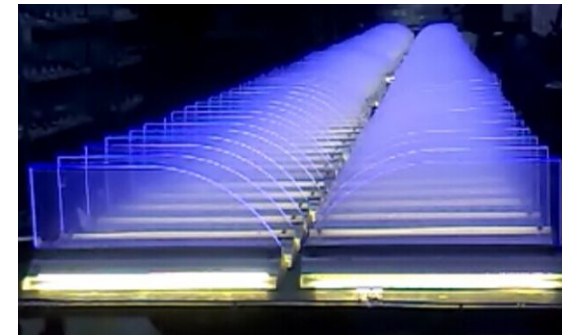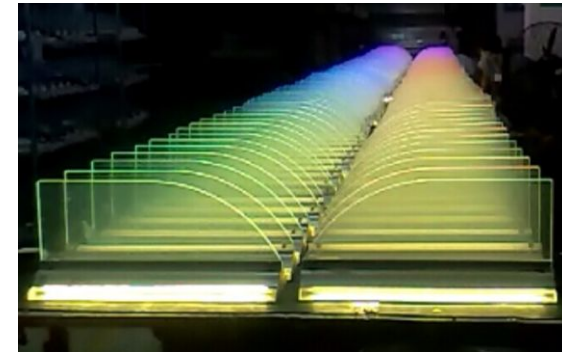









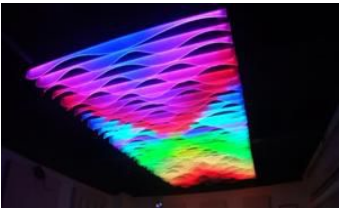


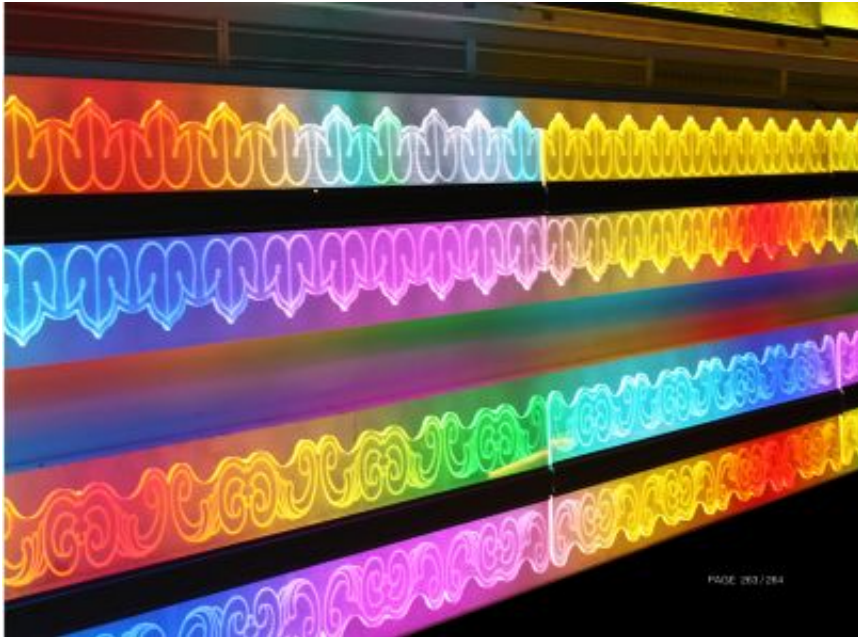

PAISE 203 / 204

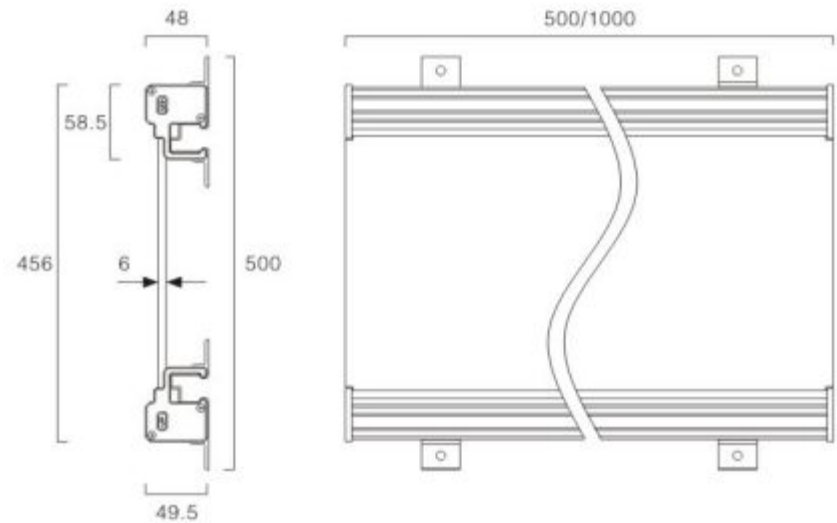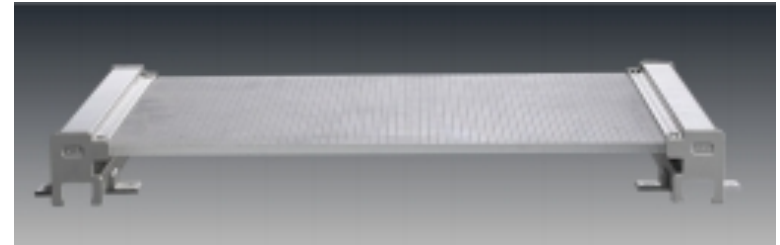

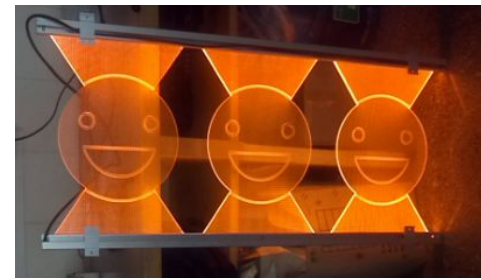

  	Light source	RGB triple SMD 5050
	Working Power	12W
	Operating Voltage	DC24V
	Protection Grade	IP65
	Lumen Depreciation	50000 Hours With 30% Depreciation
	Beam angle	60°, 90°, 120°, 180° ...customized
	Lighting Color & finishing color	Customized
	Material	Aluminum Alloy;high density & high-quality light guide plate with excellent weather resistance
	Pakaging	
	Control	standard DMX512 or SPI signal
Operating temperature:	-20°C~50°C	

Trädgårdsteknik AB  
Helsingborgsvägen Varalöv  
262 96 ÄNGELHOLM  
Tel: 0431 -22290  
Fax: 0431 -22270  
Mail: [info@tradgardsteknik.se](mailto:info@tradgardsteknik.se)  
Webb: [www.tradgardsteknik.se](http://www.tradgardsteknik.se)