



Pressure Sustaining Pilot Valve With Integral Needle Valve

This pilot integrates all principal functions of a 2-Way control circuit in a single assembly. It is a direct acting valve, actuated by a pressure responsive diaphragm, which tends to reach equilibrium with the set spring force. When used in a pressure relief/sustaining circuit, the pilot modulates open as upstream pressure rises above set point. An integral needle valve acts as an upstream flow restrictor as well as a closing speed control.

Features

- Integral needle valve
- Internal or external pressure sensing
- Differential pressure sensing
- Direct pressure gauge installation

Typical Applications

- Pressure Relief/Sustaining Valve sizes 6-14" (Standard model #3)
- Differential Pressure Sustaining Valve sizes 6-14" (Modified to differential sensing #3D)
- Surge Anticipating Valve sizes 1 1/2-4" as high pressure pilot (Standard model #3)

Technical Data

Pressure Rating: 40 bar (600 psi)

Working Temperature: Water up to 80°C (180°F)

Flow Factor: Kv 1.1 (Cv 1.3)

Standard Materials:

Body & cover: Brass

Elastomers: NBR

Internals: Stainless Steel & Brass

Spring: Galvanized Steel

Optional Materials:

Metal Parts: Stainless Steel, Nickel Aluminum Bronze, Hastalloy

Elastomers: FPM (Viton®)


Adjustment Range

Spring	Pressure		
	bar	psi	
16	1-16	15-230	Standard
10	0.8-10	11-150	
16*	2-30	30-430	Optional
16*	2-45	30-650	

* With high pressure setting kit

Connections

Z - Upstream **A** - Valve control chamber
C - Downstream **F/D** - External sensing/pressure gauge

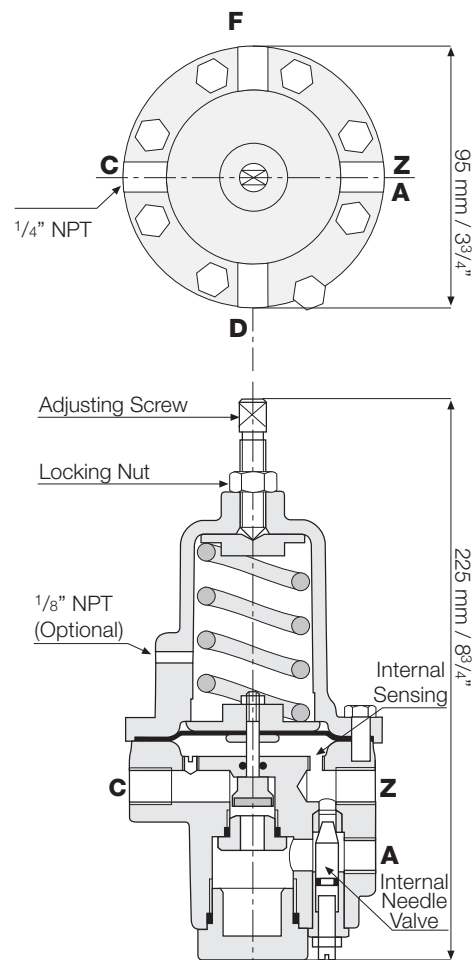

Weight: 2.7 Kg / 6 lbs.

* High pressure setting kit add 15 mm (5/8") to pilot height.



Trädgårdsteknik AB
Helsingborgsvägen 578
262 96 ÄNGELHOLM
Telefon: 0431-222 90
Telefax: 0431-222 70
info@tradgardsteknik.se
www.tradgardsteknik.se